



Daily, Weekly and Monthly Rentals Available

VST-40

Insulated Articulated Telescopic Aerial Device

PLATFORM ROTATION: 180° Hydraulic

JIB CAPACITY: Up to 1000 lbs.

WORKING HEIGHT: Up to 45' 4"

HORIZONTAL REACH: Up to 30' 2"



Attenuator, Cone, Scissor and Bucket Trucks Available



S.P.A. SAFETY SYSTEMS LLC

**"KEEPING WORKERS SAFE
ON OUR HIGHWAYS"**

FLANDERS, NJ • 973-347-1101
WWW.SPASAFETYSYSTEMS.COM




VST-40

Daily, Weekly and Monthly Rentals Available

Articulated Telescopic Aerial Device

General Specifications (based on 40" frame)	VST-40-I
Horizontal Reach	30'-2" (9.2 m)
Maximum Platform Capacity	600 lbs. (272 kg)
Platform Rotation	180°
Maximum Jib Capacity	1000 lbs. (454 kg)
HEIGHT WITH STANDARD PEDESTAL	
Bottom of Platform Height	36'-4" (11.1 m)
Working Height	41'-4" (12.6 m)
Stowed Travel Height	10'-6" (3.2 m)
BOOM ACTION	
Outer/Inner Boom Articulation	-25° to +85°
Inner Boom Extension	79" (2.0 m)
Lower Boom Articulation	0° to +87°
Rotation	360° Continuous
INSULATION (WHERE APPLICABLE)	
Upper Boom Insulation Gap	46" (1.2 m)
Lower Boom Insulation Gap	12" (305 mm)
VEHICLE REQUIREMENTS	
Cab to Axle (minimum)	84" (2.14 m)
GVWR	17,500 lbs. (7,940 kg)

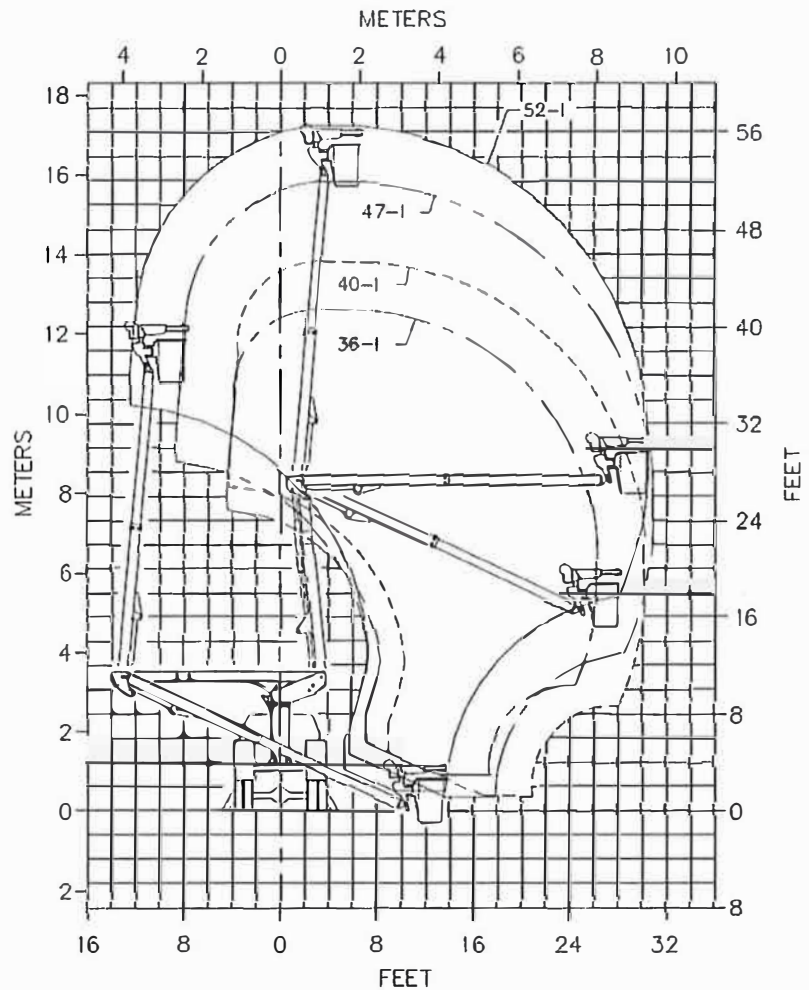

OPTIONS:

- Auxiliary Outriggers
- Second Set of Tool Power Ports
- Backup Pump
- Hydraulic Jib/Winch (Reduces Platform Capacity 100 lbs.)
- Various Pedestal Heights
- TruGuard
- Automatic Boom Latch
- Platform Elevator

NOTE:

1. Specifications may vary without prior notice
2. Required GVWR can vary significantly with chassis, lift mounting, location, service body, accessories and desired payload.

Attenuator, Cone, Scissor and Bucket Trucks Available



S.P.A. SAFETY SYSTEMS LLC

"KEEPING WORKERS SAFE ON OUR HIGHWAYS"

FLANDERS, NJ • 973-347-1101
WWW.SPASAFETYSYSTEMS.COM

